

**Certification and Approval**



Certification Code	EEx d II 2 G IIB or IIC T5 or T4 L (See lamp tables for T rating)
Certification number	SIRA 01 ATEX I033
Certification standard	EN 60079-0, I
Protection	IP 66

**Features Options**

High Impact Resistant Polycarbonate lens  
 Anodised marine grade Aluminium  
 50,000 hr electronic ballast  
 EOL lamp protection  
 Vibration resistant

Wide range of voltage options  
 Large range of lamp options  
 IP68 versions  
 Through wiring

FOR AMBIENT TEMPERATURE “T” RATINGS SEE TABLES AT REAR OF CATALOGUE

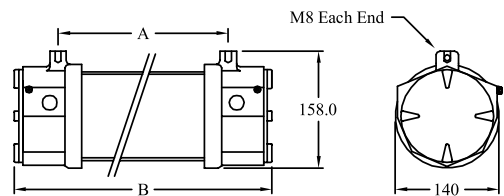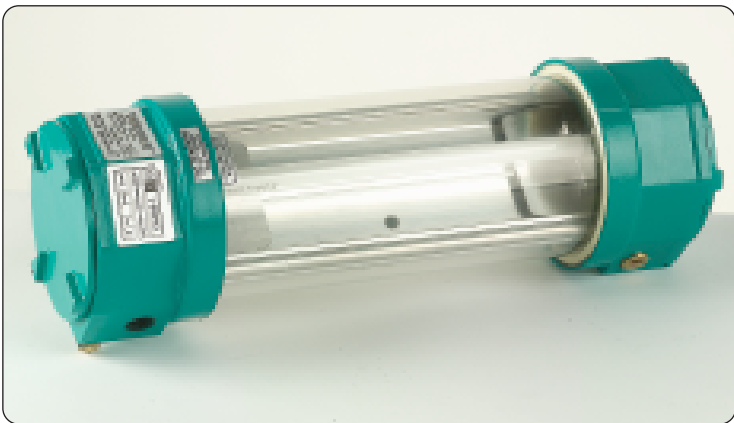


Size	Model	A	B
1	8w	335	448
2	18w	632	752
4	36w	1242	1362
5	58w	1542	1662
6	70w	1806	1926


All dimensions in mm



Easy lamp change system



Threaded end cap



Threaded mounting point

# Technical Data

Supply Voltage	230v 50/60Hz Check for alternative voltages															
Operating Temperature	-20°C to +55°C standard supply subject to lamp and ambient temperature combinations (see table opposite).															
Control Gear	Electronic instant start, Switch start															
Lamp Options Cable Entries	8w (T5), 18w, 36w, 58w, 70w (T8) (Lamps not provided), 4 x M20 - 2 each end, (2 plugged) as standard															
Terminals	3 wire and earth. Cable size 4mm <sup>2</sup> max Through wiring option available on 18w to 70w sizes															
Mounting Facility	2 x M8 tapped holes vertical and horizontal at both ends.															
Access	Terminals accessed via threaded end cover as is the gear tray which slides out.															
Material	Corrosion resistant marine grade anodised aluminium body and high impact polycarbonate tube.															
Finish	2 Pack epoxy paint on primed surface. Standard colour - Aqua Additional costs for non standard colours															
Weight	<table border="0"> <tr> <td>Single Lamp</td> <td>1 8w</td> <td>3.0Kgs</td> <td>2 18w</td> <td>5.0Kgs</td> </tr> <tr> <td></td> <td>4 36w</td> <td>7.0Kgs</td> <td>5 58w</td> <td>8.0Kgs</td> </tr> <tr> <td></td> <td>6 70w</td> <td>9.0Kgs</td> <td></td> <td></td> </tr> </table>	Single Lamp	1 8w	3.0Kgs	2 18w	5.0Kgs		4 36w	7.0Kgs	5 58w	8.0Kgs		6 70w	9.0Kgs		
Single Lamp	1 8w	3.0Kgs	2 18w	5.0Kgs												
	4 36w	7.0Kgs	5 58w	8.0Kgs												
	6 70w	9.0Kgs														
Features	Highly versatile luminaire with large lamp and voltage ranges Durable and slim line construction Removable lamp assembly for ease of lamp change. High IP rating															